

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

As rescanning documents *will not* correct images,
Please do not report the images to the
Image Problem Mailbox.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
29 March 2001 (29.03.2001)

PCT

(10) International Publication Number
WO 01/21331 A1

(51) International Patent Classification: B07C 5/14

(21) International Application Number: PCT/SE00/01752

(22) International Filing Date:
11 September 2000 (11.09.2000)

(25) Filing Language: Swedish

(26) Publication Language: English

(30) Priority Data:
9903275-7 15 September 1999 (15.09.1999) SE(71) Applicant (for all designated States except US): C. GUN-
NARSSONS VERKSTADS AB [SE/SE]; Olvågen, S-340
30 Vislanda (SE).

(72) Inventor; and


(75) Inventor/Applicant (for US only): GUNNARSSON,
Cenneth [SE/SE]; Växjövägen, S-340 30 Vislanda (SE).(74) Agents: WALLENGREN, Yngvar et al.; Patentbyrå Y
Wallengren AB, Box 116, S-331 21 Värnamo (SE).(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,
DE, DE (utility model), DK, DM, DZ, EE, ES, FI, GB, GD,
GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,
MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI,
SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU,
ZA, ZW.(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG,
CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— With international search report.

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: AN APPARATUS FOR SORTING TIMBER

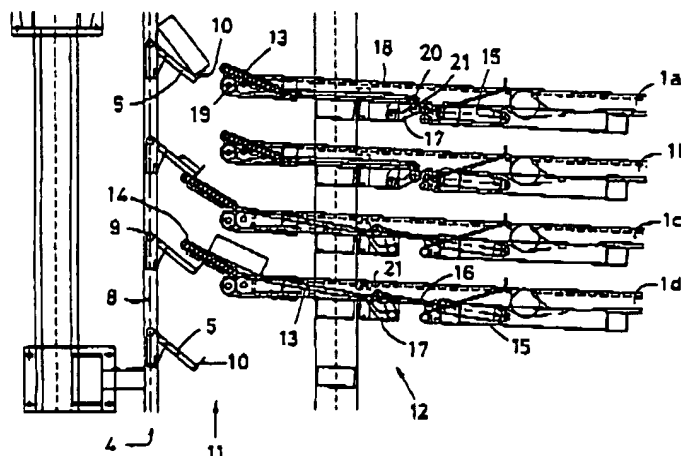

(57) Abstract: An apparatus for sorting individual timber pieces of different dimensions and/or qualities into a number of mutually superposed sorting compartments (1) comprises a conveyor and a transfer device (12). The conveyor transports individual timber pieces in the vertical direction along the infeed ends of the sorting compartments (1). The longitudinal direction of the timber pieces is approximately horizontal and transversely directed in relation to the longitudinal direction of the sorting compartments (1). The transfer device (12) transfers a specific timber piece from the conveyor to a specific sorting compartment (1). The transfer device (12) has at least one transfer member (15) per sorting compartment (1). Each transfer member (15) is movable between a passive position outside the path (4) of the conveyor and an active position within the path (4) of the conveyor. The path (4) of the conveyor is substantially vertical and recilinear and located a distance (11) from the infeed ends of the sorting compartments (1).

WO 01/21331 A1

JCTIS Rec'd PCT/PTO 10/070988
4 MAR 2002

WO 01/21331

PCT/SE00/01752

AN APPARATUS FOR SORTING TIMBER

TECHNICAL FIELD

5 The present invention relates to an apparatus for sorting individual timber pieces of different dimensions and/or qualities into a number of mutually superposed sorting compartments, and comprising a conveyor for vertical transport along the infeed ends of the sorting compartments of individual timber pieces with their longitudinal direction approximately horizontal and transversely directed in relation to the longitudinal direction of the sorting compartments, and a transfer device for
10 transferring a specific timber piece from the conveyor to a specific sorting compartment.

BACKGROUND ART

15 Apparatuses of the type intimated by way of introduction are previously known in the art. The individual sorting compartments are represented by approximately horizontal conveyors of considerable length, of the order of magnitude of 50-100 m or possibly more. These conveyors are superposed on one another with a spacing of approximately 30-40 cm. The number of sorting compartments in the vertical
20 direction may be large, often as many as 30-50 in number.

Along the infeed ends of the sorting compartments, a conveyor runs which transports the individual timber pieces up to a certain, predetermined sorting compartment
25 where the timber piece is discharged by means of a transfer device and is fed into the selected sorting compartments. The individual timber pieces may arrive in random sequence as regards dimensions and qualities, but are identified and registered by a computer which controls the transfer devices so that the timber pieces are fed to the correct sorting compartment. The conveyor which runs in conjunction with the
30 infeed ends of the sorting compartments moves continuously.

The transfer devices have hitherto been placed in the downwardly moving conveyor which is in conjunction with the infeed ends of the sorting compartments. This implies that, when a transfer device is activated, it must extend through the path

WO 01/21331

2

PCT/SE00/01752

which the individual timber pieces described on the downwardly moving conveyor. This entails that a transfer device must be activated, transfer its timber piece to the associated sorting compartment and thereafter return to the starting position outside the path of movement of the timber pieces before a new timber piece may pass. Such
5 a work cycle takes considerable time, and so capacity will not be that intended.

It has thus been the work rate of the transfer devices which has hitherto limited the overall capacity of the plant. As a result, it has not been possible to carry out such working operations as sawing, normal mechanised transport within the plant, cutting-
10 to-length, etc., at maximum speed, for which reason the plant as a whole has too low capacity.

In order to attempt to increase the capacity of the plant, the time available for each working cycle in the transfer devices has been increased. This has been achieved by
15 an increase of the linear transport length for each timber piece on the downwardly moving conveyor from the uppermost sorting compartment to the lowermost. In order to achieve this, the downwardly moving conveyor has been inclined in that the individual sorting compartments do not begin in a vertical plane but in a plane which inclines to the vertical. This has been realised in that an upper sorting compartment
20 extends out beyond a subjacent sorting compartment. Given that the downwardly moving conveyor follows this pattern and, hence, in principle maintains constant distance to the mouths of the sorting compartments, the linear transport length in the downwardly moving conveyor will be longer than would have been the case if the sorting compartments had been arranged with their infeed ends in a vertical plane.

25

The above-described oblique inclination of the infeed ends of the sorting compartments entails that the lowermost, and hence the shortest, sorting compartment will be dimensioned for the entire plant, for which reason extra costs are incurred for the unnecessarily long upper sorting compartments.

30

Furthermore, despite the oblique inclination of the conveyor, it has not been possible to achieve the work rate for the plant which is desirable.

WO 01/21331

3

PCT/SE00/01752

PROBLEM STRUCTURE

The present invention has for its object to design the apparatus intimated by way of introduction such that the drawbacks inherent in prior art technologies are obviated.

- 5 In particular, the present invention has for its object to design the apparatus according to the present invention so that its capacity is greatly improved as compared with prior art technology. Further, the present invention has for its object to obviate the need for unnecessarily long sorting compartments.

10 SOLUTION

- The objects forming the basis of the present invention will be attained if the apparatus intimated by way of introduction is characterised in that the transfer device has at least one transfer member per sorting compartment, and that each transfer
- 15 member is movable between a passive position outside the path of the conveyor and in conjunction with the infeed end of the sorting compartment, and an active position within the path of the conveyor for engagement with a timber piece carried by the conveyor and transferring it to the sorting compartment.

20 BRIEF DESCRIPTION OF THE ACCOMPANYING DRAWINGS

The present invention will now be described in greater detail hereinbelow, with particular reference to the accompanying Drawings. In the accompanying Drawings:

- 25 Fig. 1 is a vertical side elevation of the infeed ends of an arrangement of mutually superposed sorting compartments; and
- Fig. 2 is a vertical side elevation, on a larger scale, of the apparatus according to the present invention.

30

DESCRIPTION OF PREFERRED EMBODIMENT

Fig. 1 is a vertical side elevation of one end of a plant for sorting timber, so that the timber, after sorting, will be arranged according to timber dimension and quality.

WO 01/21331

4

PCT/SE00/01752

with each dimension and quality separately or possibly a range of dimensions or qualities together in each sorting compartment. The plant is based on a bearing structure of steel beams and, in the illustrated embodiment, is of a height of approximately 20m. The plant includes a number of sorting compartments 1 for
5 accommodating selected timber pieces. The sorting compartments 1 are superposed on one another with a spacing in the vertical direction of 30-40 cm. Each sorting compartment includes a number of conveyors disposed at the same height and parallel with one another and supporting the timber pieces which lie only in one layer in each sorting compartment and which have their longitudinal direction horizontal
10 and at right angles to the longitudinal directions of the conveyors and the sorting compartments, i.e. at right angles to the plane of the Drawings in Figs. 1 and 2.

At the left-hand end of the sorting compartments in Fig. 1, there is disposed a vertically running conveyor 2 with an upwardly moving part 3 and a downwardly
15 moving part 4. The conveyor 2, which may suitably be vertical, has a number of uniformly spaced carriers 5 of which only an upper and a lower are intimated on the downwardly moving part 4. The carriers 5 are intended for carrying individual timber pieces such that these have their longitudinal direction horizontal and at right angles to the plane of the Drawings in Fig. 1. While only one conveyor 2 is shown in Fig. 1,
20 it is assumed that at least two, but preferably three or four conveyors are disposed parallel with one another and with the carriers 5 at the same height so that a timber piece is, in practice, carried by a number of carriers 5.

For feeding timber pieces to the vertical conveyor 2, an incoming conveyor 6 is
25 disposed uppermost in the beam frame and transports individual timber pieces in a direction from right to left in Fig. 1. In what sequence and what dimensions or qualities, respectively, the individual timber pieces have on the incoming conveyor 6 have previously been sensed and corresponding information stored in a computer. The individual timber pieces have thereby been allocated their own address, i.e. a
30 sorting compartment 1 of their own.

Between the incoming conveyor 6 and the vertical conveyor 2, there is disposed a
tilter 7 where each individual timber piece is displaced from the incoming conveyor 6 to one of the carriers 5 included in the vertical conveyor 2. During this transfer of

WO 01/21331

PCT/SE00/01752

5

the individual timber pieces, they are turned over so that the original underside will be turned to face upwards when the timber pieces lie on the carriers 5.

5 The transfer of the individual timber pieces from the incoming conveyor 6 to the individual carriers 5 of the vertical conveyor 2 takes place in such a manner that the position of each individual timber piece is known on the downwardly moving part 4 of the vertical conveyor 2.

10 Fig. 2 shows a partial magnification of a part of Fig. 1, and this part may be located anywhere whatever in the vertical direction of the downwardly moving part 4 of the vertical conveyor.

15 It will be apparent from the Figure that the downwardly moving part 4 includes a profile rail 8 in which runs a chain which supports the individual carriers 5. The carriers are further guided interiorly in the profile rail with the aid of rollers 9. It will be apparent from the Figure that the carriers 5 incline downwards in a direction away from the profile rail 8 and in a direction towards the sorting compartments 1. Further, each carrier 5 has an upstanding arrest member 10 at its free end.

20 It will be apparent from Fig. 1 that the infeed ends of the sorting compartments 1 lie straight above one another in a common and substantially vertical plane. It will also be apparent that, between this plane and the carriers 5 of the downwardly moving part 4, there is a gap or interspace 11 which is substantially of uniform width throughout its vertical extent and which, for reasons of capacity, must be as narrow as is practically possible. Further, the free ends 10 of the carriers 5 move in a
25 substantially vertical plane which is parallel with, or at least substantially parallel with, the plane defined by the infeed ends of the sorting compartments 1.

30 At the infeed end of each sorting compartment 1, there is disposed a transfer device 12 which has a transfer member 13 which is disposed for transferring an individual timber piece on a carrier 5 to the infeed end of a specific sorting compartment. The transfer device 12 is placed on that side of the interspace 11 which is turned to face towards the sorting compartments 1. Each transfer member 13 in the transfer devices 12 is movable between a passive position with an outer end portion outside the path

WO 01/21331

PCT/SE00/01752

6

which is defined by the timber pieces on the downwardly moving part 4 of the conveyor 2 and in conjunction with the infeed end of the sorting compartment 1, and an active position with the end portion within the above-mentioned path for engagement with a timber piece carried by the conveyor 2 and transferring it to the
5 sorting compartment 1.

In Fig. 2, both of the transfer members 13 disposed uppermost in the Figure, i.e. those transfer members disposed in conjunction with sorting compartments 1a and 1b, are in their passive positions, while the transfer members which are disposed in conjunction with sorting compartments 1c and 1d are located in their projecting,
10 active positions. It will further be apparent that the outer end of the transfer members 13 at the sorting compartments 1a and 1b are located a slight distance from the carriers 5 and the timber pieces resting on them. This distance should be as slight as possible, since the necessary length of movement between the passive and active
15 positions of the transfer members 13 will then be shorter, as also applies to the time for a work cycle of the transfer member.

The transfer member 13 in conjunction with the sorting compartment 1c is located in its projecting, active position, and it will be apparent that the timber piece on the carrier located immediately above the transfer member will be lifted free from the
20 arrest member 10 when the carrier continues its downward movement. In such instance, the timber piece will rest on the transfer member 13 which inclines to the horizontal plane in approximately the same manner as the carriers 5 incline downwards. Given that the downwardly directed movement and speed of the timber
25 piece on the carrier 5 will be deflected into a movement and speed along the transfer member 13, the relevant timber piece will slide along the upper side of the transfer member or roll on the rollers 14 which are provided there. The timber piece on the lowermost transfer member shown in the Figure at sorting compartment 1d has partly been displaced along the transfer member in a direction to the right in on the sorting
30 compartment 1d where it is transported further in a direction to the right.

Each transfer member 13 is movable substantially in a translation movement which is generated by a cylinder unit 15 with a piston rod or ram 16. The free end of the piston rod 16 is pivotally secured at 21 in a rocker 17 which is pivotal about a shaft

WO 01/21331

PCT/SE00/01752

7

18. The transfer member 13 proper is also pivotally secured in the rocker 17 at a pivot shaft 20. The outer and obliquely upwardly directed end portion of the transfer member is guided by and supported on a roller 19. Thus, the end portion may be lifted up from the roller 19.

5

When the apparatus according to the present invention is to work with varying widths of timber pieces, it is appropriate to design the drive means for the transfer members 13 in such a manner that the length of the translation movement is adjustable. In narrow timber pieces, a shorter movement may be selected, which increases the work rate of the transfer device. On the other hand, in wide timber pieces a longer length of movement is selected in order to ensure that the wide timber piece may reliably be able to rest on the end section of the transfer member 13 when it is lifted free of the carrier 5 on which it has rested.

15 The above-described geometry entails that the transfer member 13, in particular its outer end section, superposed on the translation movement, also has vertical movement components. Because of the angling of the transfer member 13 upwards in a direction in towards the vertical conveyor and its support on the roller 19, it will have, from the active position (at compartments 1c and 1d), a considerable downward movement, for which reason the risk is greatly reduced that a timber piece which is in the process of being transferred from a carrier 5 to the transfer member 13 will bounce – both are moving downwards. This downwardly directed movement also entails that the risk is reduced that the next carrier 5 and timber piece resting thereon will collide with an end section of a transfer member 13 which is on its way in towards a sorting compartment 1.

25

Further, the angle of the transfer member 13 in relation to a horizontal plane is greater in the active position (corresponds more closely to the inclination of the carrier 5) than is the case in the passive position.

30

The speed of the transfer member 13 is not uniform, thus the illustrated geometry gives a relatively slow acceleration/retardation in the proximity of the passive position, for which reason a timber piece is gently braked to a speed which is suitable for infeed into a sorting compartment. In the active, projecting position, the

WO 01/21331

8

PCT/SE00/01752

acceleration/retardation is considerably greater, for which reason the transfer member 13 on return to its passive position will rapidly achieve a speed which corresponds to or exceeds the speed of movement of the timber piece.

- 5 As an alternative to the roller path with the rollers 14 on the outer section of the transfer members, it is also possible to employ a driven belt which circulates with its upper part in a direction in towards the sorting compartment 1. In such a construction, each timber piece is driven by machine power in towards the sorting compartment 1 and is not exclusively reliant on force of gravity and the movement
10 which has been imparted to a timber piece by a carrier 5.

- The retraction of the transfer member 13 and a timber piece resting thereon may be initiated as soon as the timber piece rests so securely on the transfer member 13 that there is no need to fear that it will fall down over the free end of the transfer member
15 13. In order to reduce this risk and in order to increase the acceleration in a direction to the right in Fig. 2 which the transfer member 13 may undergo in its return movement back to the passive position, the rollers 14 may be provided with a friction-increasing coating and one-way locks to prevent rotation in the wrong direction.

20

- In terms of performance, the present invention realises a considerable improvement over the prior art technology disclosed by way of introduction. This is partly based on the foregoing, but is also because of the fact that the counterpart to the transfer member of the present invention in prior art technology must execute a complete
25 return movement from its discharge position in the sorting compartment and through the path which the timber pieces follow along the downwardly moving conveyor before it is back at its starting position and a new timber piece may pass.

WO 01/21331

9

PCT/SE00/01752

WHAT IS CLAIMED IS:

1. An apparatus for sorting individual timber pieces of different dimensions and/or qualities into a number of mutually superposed sorting compartments (1),
5 comprising a conveyor (2) for vertical transport along the infeed ends of the sorting compartments of individual timber pieces with their longitudinal direction approximately horizontal and transversely directed in relation to the longitudinal direction of the sorting compartments, and a transfer device (12) for transferring a specific timber piece from the conveyor (2) to a specific sorting compartment,
10 characterised in that the transfer device (12) has at least one transfer member (13) per sorting compartment (1); and that each transfer member is movable between a passive position outside the path (4) of the conveyor and in conjunction with the infeed end of the sorting compartment, and an active position within the path of the conveyor for engagement with a timber piece carried by the conveyor and
15 transferring it to the sorting compartment (1).

2. The apparatus as claimed in Claim 1, characterised in that the conveyor (2) has a substantially vertical and rectilinear path of movement (4) from above and downwards, which is located a slight distance (11) from the infeed ends of the
20 sorting compartments, which lie substantially in a common vertical plane.

3. The apparatus as claimed in Claim 1 or 2, characterised in that the transfer members (13) are elongate and substantially straight with slightly obliquely upwardly end section, and extend in their active positions in the longitudinal
25 direction out from the infeed ends of the sorting compartments (1) and with the end sections slightly obliquely upwards towards the conveyor (2).

4. The apparatus as claimed in any of Claims 1 to 3, characterised in that said transfer members (13) have roller paths (14) at least on the upper side of the end
30 sections.

5. The apparatus as claimed in any of Claims 1 to 3, characterised in that the end sections of the transfer members (13) have circulating driven belts on which the

WO 01/21331

10

PCT/SE00/01752

timber pieces rest and which impart to the timber pieces an additional movement in a direction towards a sorting compartment (1).

5 6. The apparatus as claimed in any of Claims 1 to 5, characterised in that said transfer members (13) are movable in a substantially translation movement to and from active position.

10 7. The apparatus as claimed in Claim 6, characterised in that onto the translation movement of the transfer member (13) in the region of its active position on return towards the passive position, there is superposed a downwardly directed movement component at the end section of the transfer member.

15 8. The apparatus as claimed in any of Claims 6 or 7, characterised in that the translation movement for the transfer members (13) is of adjustable length.


9. The apparatus as claimed in any of Claims 1 to 8, characterised in that the conveyor (2) has carriers (5) for supporting a timber piece with approximately horizontal longitudinal direction; and that the carriers incline obliquely downwards in a direction towards the infeed ends of the sorting compartments (1).

20

10. The apparatus as claimed in any of Claims 3 to 9, characterised in that said carriers (5) and the end sections of said transfer members (13) have approximately the same inclination.

WO 01/21331

PCT/SE00/01752

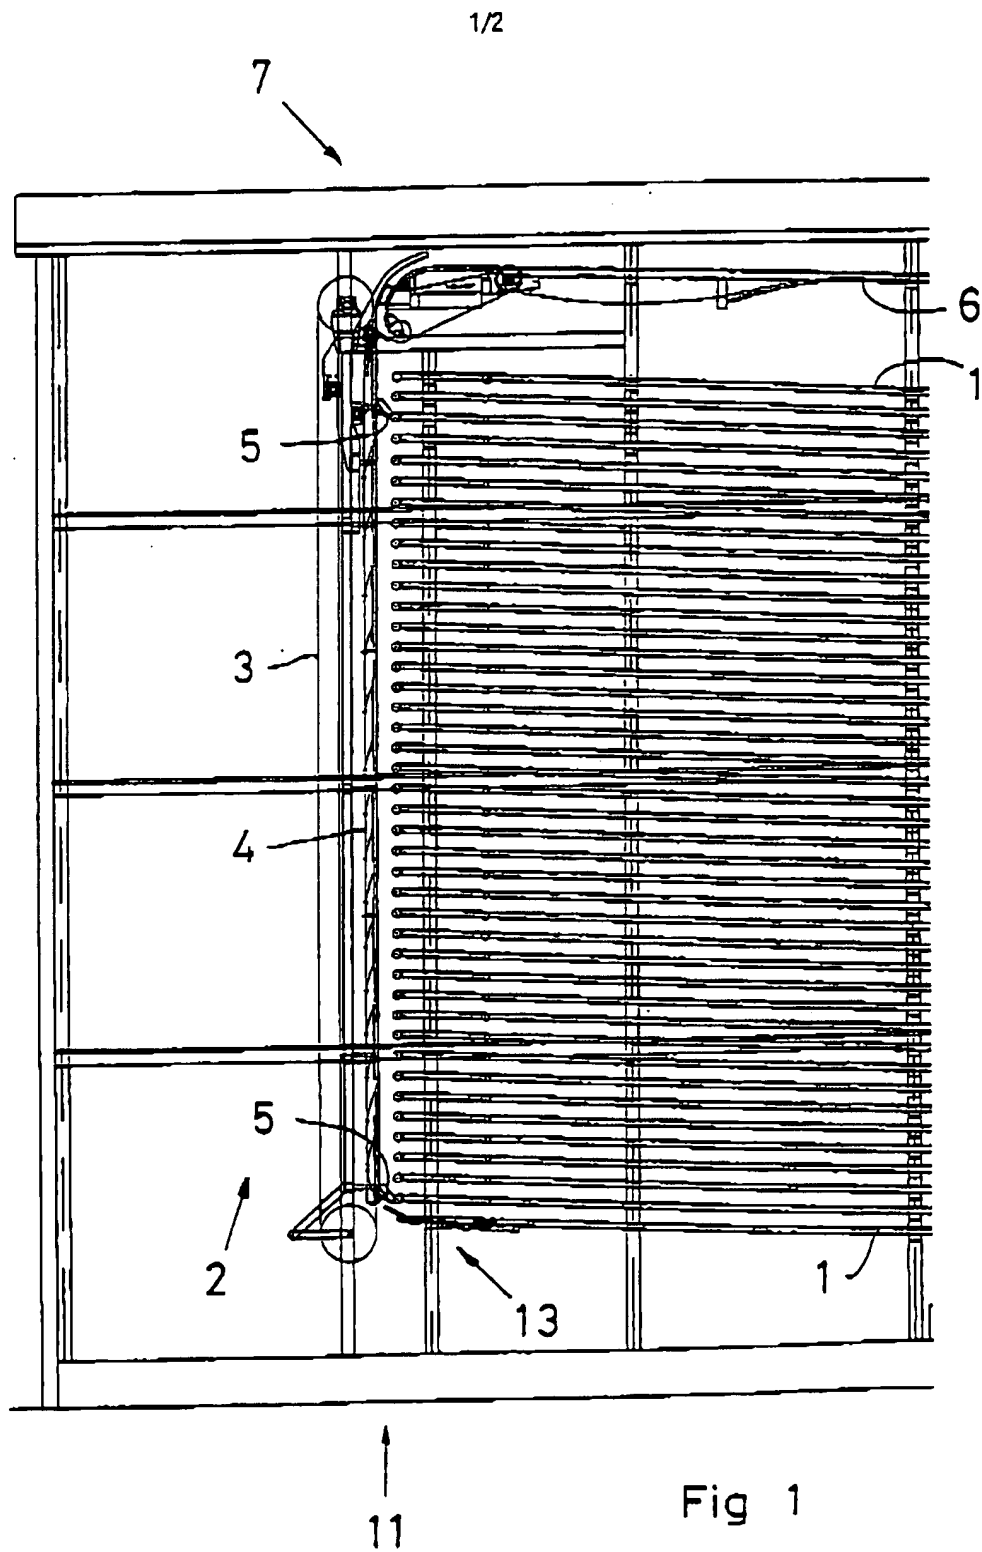

WO 01/21331

PCT/SE00/01752

2/2

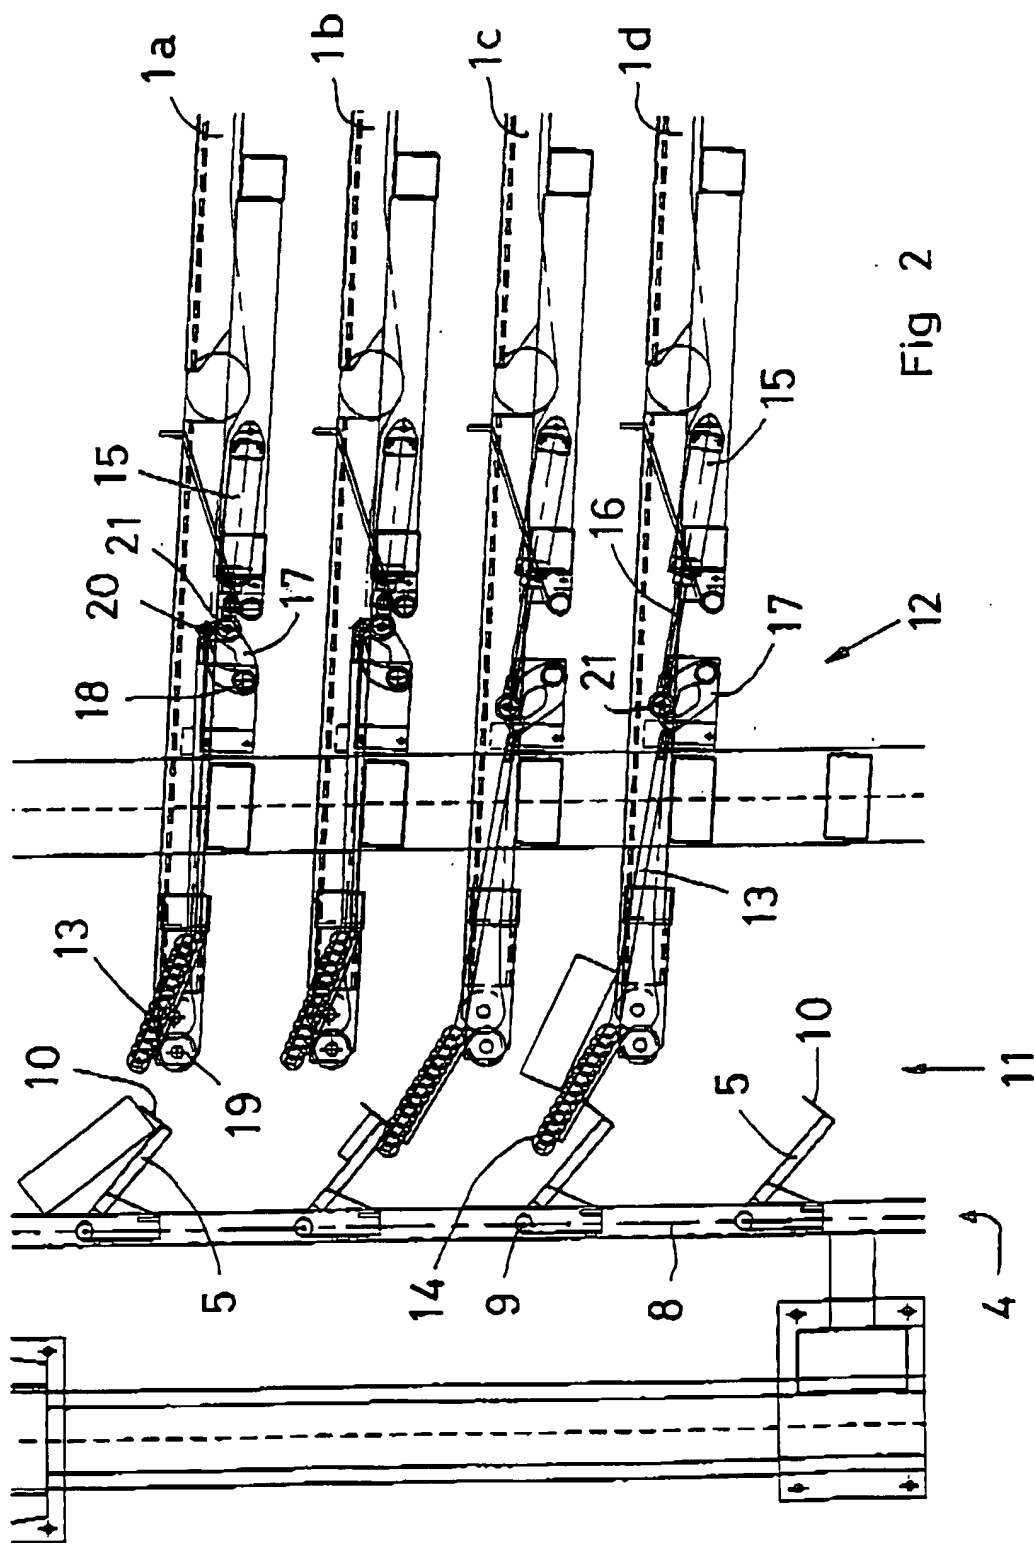


Fig 2

1

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 00/01752

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: B07C 5/14

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: B07C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2902150 A (W.H. RAMBO), 1 Sept 1959 (01.09.59) --	1-10
A	US 3782540 A (D.E. MOSELY), 1 January 1974 (01.01.74) --	1-10
A	US 4358009 A (A. RYSTI), 9 November 1982 (09.11.82) -----	1-10

☐ Further documents are listed in the continuation of Box C.
 ☒ See patent family annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier application or patent but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, demonstration or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

Z document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

4 December 2000

13-12-2000

Name and mailing address of the ISA:
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Ake Olofsson / MRo
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT
Information on patent family membersInternational application No.
PCT/SE 00/01752

Patent document cited in search report			Publication date	Patent family member(s)	Publication date
US	2902150	A	01/09/59	NONE	
US	3782540	A	01/01/74	CA 974196 A	09/09/75
US	4358009	A	09/11/82	CA 1156177 A	01/11/83
				FI 59070 B,C	27/02/81
				SE 435490 B,C	01/10/84
				SE 8007780 A	17/05/81